


Supply
Alimentation
Strom Versorgung


2 ~ N PE AC 400V or ou oder
3 ~ PE AC 230V or ou oder
2 ~ PE AC 127V or ou oder
2 ~ PE AC 230V

Fuse
Fusible
Empfohlener schutz

16A (32A-â, 2 ~ 127V)
1 ~ 220V)



2 pcs. repl. containers

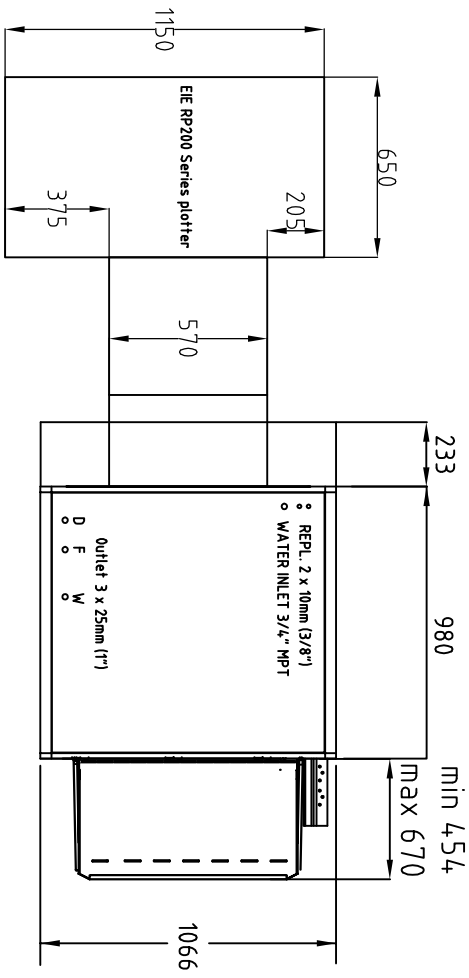

This Document contains proprietary data of Echo Graphic.
No information, reproduction or use of any part thereof may be used without written permission.

Tolerance unless otherwise specified : machined surfaces DS 2768-1
measurements under 120mm after folding ± 0.5

(0.5)	6	0.1			
(6)	30	0.2			
(30)	120	0.3			
(120)	315	0.5			
(315)	1000	0.8			
(1000)	2000	1.2			

More Than

Incl. Tol. \pm

Surface Treatment :

Material :

Designer :

Drawn : CV

Date : 27-11-03

Scale : 1:30

Name : Inst.view EG 750

EIE RP200

K.nr :

Drawing no. : 6378-200

Echo Graphic

Håndværkervej 2-6
DK-9560 Hadsund Danmark

Telephone 98571965
Telefax 98571591