



- Supply
Alimentation
Strom Versorgung
- 2 ~ N PE AC 400V or ou oder
 - 3 ~ PE AC 230V or ou oder
 - 2 ~ PE AC 127V or ou oder
 - 2 ~ PE AC 230V
- Fuse
Fusible
Empfohlener schutz
- 16A (32A at 2 ~ 127V)
bei 1 ~ 220V
- RP300 1130
RP500 1390
RP700 1450



2 pcs. repl. containers

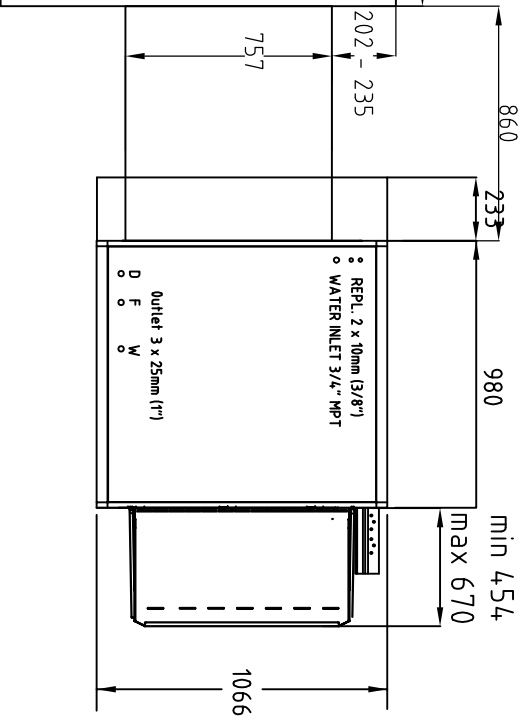

- REPL. 2 x 10mm (3/8")
 - WATER INLET 3/4" NPT
- Outlet 3 x 25mm (1")
- D
F
W

This Document contains proprietary data of Echo Graphic.
No information, reproduction or use of any part thereof may be used without written permission.
Tolerance unless otherwise specified : machined surfaces DS 2768-1
measurements under 120mm after folding ±0.5

Echo Graphic
Håndværkervej 2-6
DK-9560 Hadsund Denmark
Telephone 98571955
Telefax 98571591

More Than	Incl	Tol	Surface Treatment	Designer :	Drawn :	Date :	Scale :
(0.5)	6	0.1				15-02-11	--
(8)	30	0.2					
(30)	120	0.3					
(120)	315	0.5					
(315)	1000	0.8					
(1000)	2000	1.2					

Name : Inst.view EG 750
EIE RP300 RP500 RP700

Knr :
Drawing no. : 6378-300