



min 454  
max 670

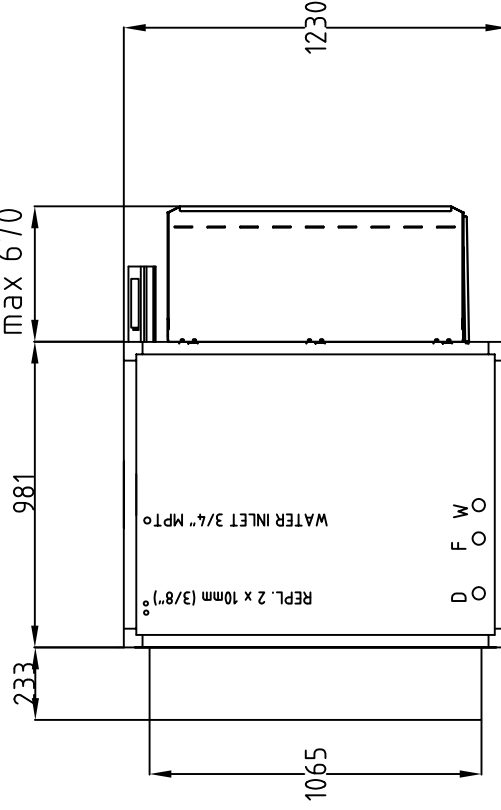

2 Pcs. repl. containers



Supply  
Alimentation  
Strom Versorgung

1 ~ PE AC 230V or ou oder  
2 ~ PE AC 127V

Fuse  
Fusible  
Empfohlener schutz

16A

## Echo Graphic A/S

Haandvaerkervej 2  
DK-9560 Hadsund, Denmark  
Phone int.: +45 98 57 19 55  
Fax int.: +45 98 57 15 91

Design/Draw : CV

Scale : 1 : 25

Date : 23-06-04

Installation view EG 900

Drawing no. :  
6383 A

Name :