


Supply
Alimentation
Strom Versorgung


2 ~ N PE AC 400V or ou oder
3 ~ PE AC 230V or ou oder
2 ~ PE AC 127V or ou oder
~ PE AC 230V

Fuse
Fusible
Empfohlener schutz

16A (32A-0-
at 2 ~ 127V
bei 1 ~ 220V)



2 pcs. repl. containers

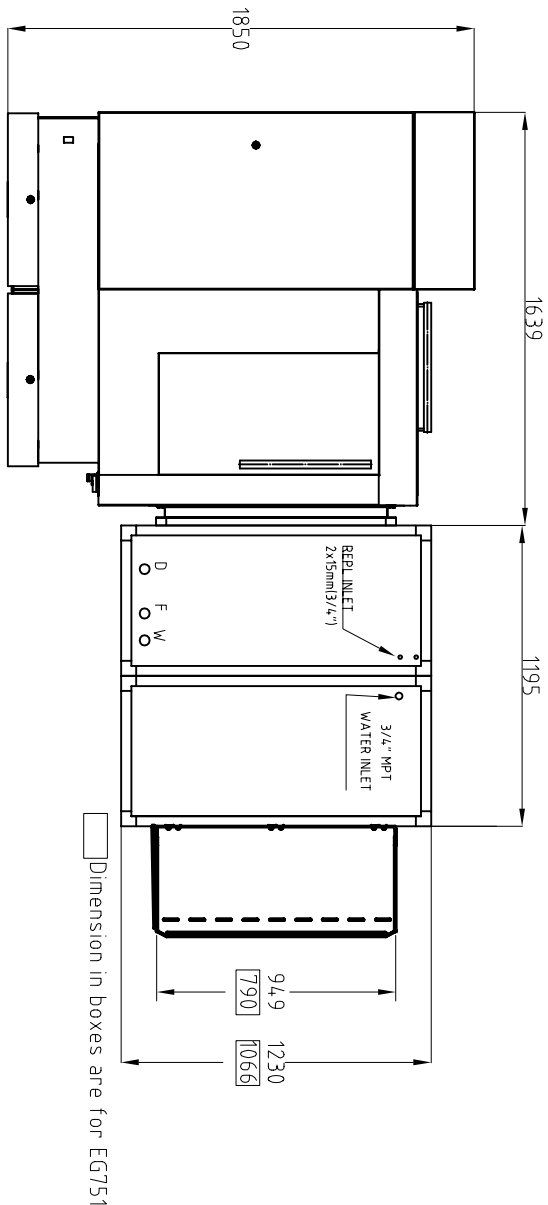

Echo Graphic A/S

Haandvaerkervej 2
DK-9560 Hadsund, Denmark
Phone int.: +45 98 57 19 55
Fax int.: +45 98 57 15 91

Design/Draw : CV

Scale : 1 : 30

Date : 18 - 01 - 05

Installation view

Name : EG 901/ EG751 Silver-Writer2

Drawing no. :

6385